


# FAMILIA NACTUS SMART


## MODULO NACTUS SMART 16 LEDs - DP16

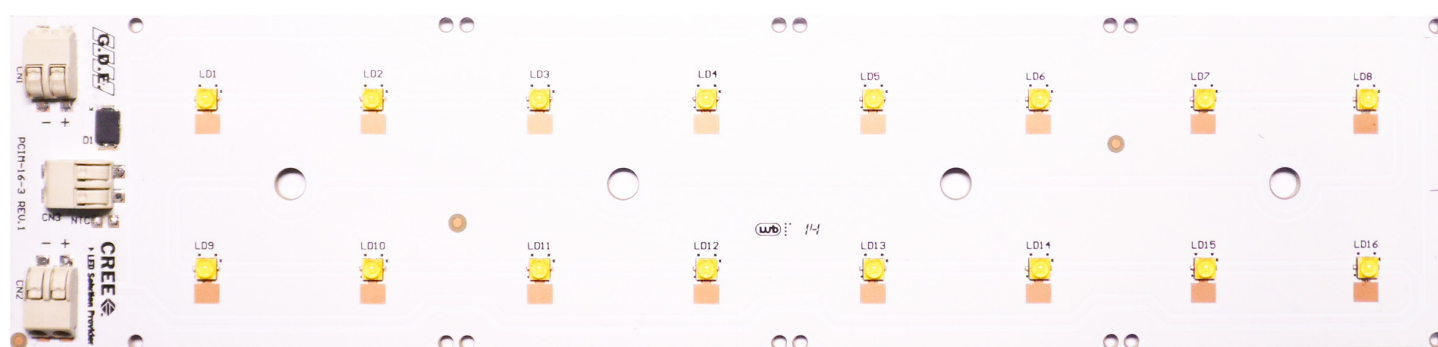

### MODULO NACTUS SMART 16 LEDs - DP16

LEDs Cree	XTE ~ XPL
Temperatura de Cor	2.700k ~ 6.500k
Potencia Máxima	85W ~ 167W
Fluxo Luminoso Máximo (Tj:25°C)	8.300 lm ~ 16.300 lm
PLACA CIRCUITO IMPRESSO	
MATERIAL - MCPCB	ALUMÍNIO
DIMENSÕES	55,9x245,8x1,6mm


## MODULO NACTUS SMART 12 LEDs - DP12

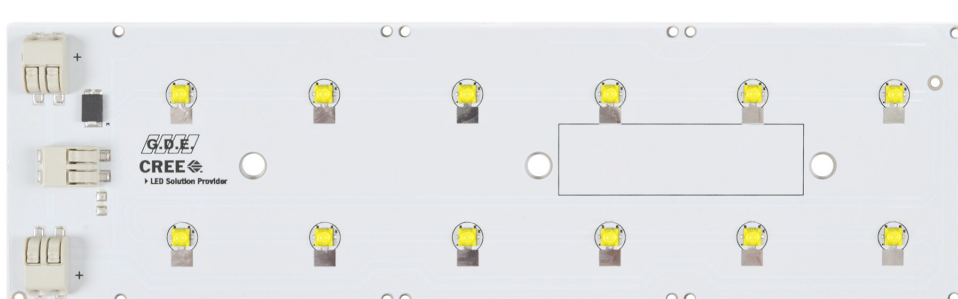

### MODULO NACTUS SMART 12 LEDs - DP12

LEDs Cree	XTE ~ XPL
Temperatura de Cor	2.700k ~ 6.500k
Potencia Máxima	64W ~ 125W
Fluxo Luminoso Máximo (Tj:25°C)	6.200 lm ~ 12.200 lm
PLACA CIRCUITO IMPRESSO	
MATERIAL - MCPCB	ALUMÍNIO
DIMENSÕES	55,9x190x1,6mm


## MODULO NACTUS SMART 8 LEDs - DP8

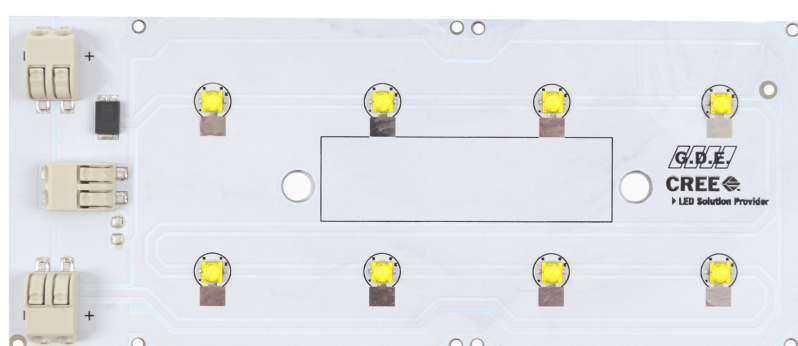

### MODULO NACTUS SMART 8 LEDs - DP8

LEDs Cree	XTE ~ XPL
Temperatura de Cor	2.700k ~ 6.500k
Potencia Máxima	42W ~ 84W
Fluxo Luminoso Máximo (Tj:25°C)	18.800 lm ~ 36.700 lm
PLACA CIRCUITO IMPRESSO	
MATERIAL - MCPCB	ALUMÍNIO
DIMENSÕES	55,9x134,1x1,6mm

## MODULO NACTUS SMART 4 LEDs - DP4

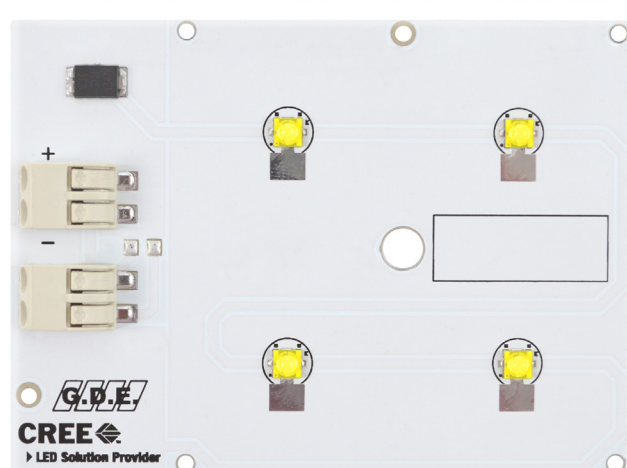

### MODULO NACTUS 4 LEDs - DP4

LEDs Cree	XTE ~ XPL
Temperatura de Cor	2.700k ~ 6.500k
Potencia Máxima	21W ~ 42W
Fluxo Luminoso Máximo (Tj:25°C)	2.090 lm ~ 4.080 lm
PLACA CIRCUITO IMPRESSO	
MATERIAL - MCPCB	ALUMÍNIO
DIMENSÕES	55,9x78,2x1,6mm